


## WO1602I Character 16x2

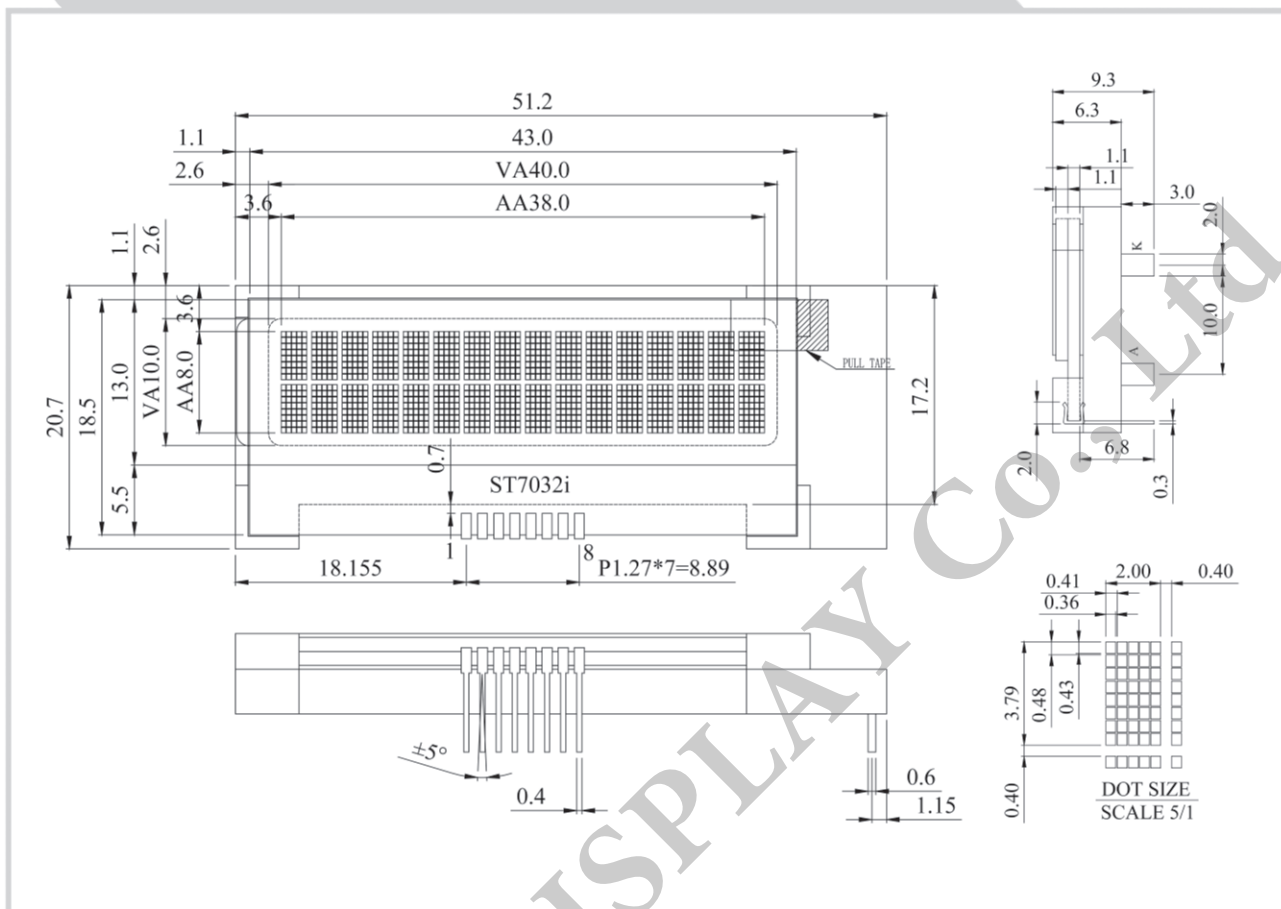

### Feature

1. 1.5x8 dots includes cursor
2. Built-in controller ST7032
3. 3.3V/5V power supply
4. 1/16 duty cycle

Pin No.	Symbol	Description
1	V <sub>out</sub>	Positive Voltage output
2	CAP1N	DC/DC voltage converter.
3	CAP1P	DC/DC voltage converter.
4	V <sub>DD</sub>	Power supply for logic
5	V <sub>SS</sub>	Ground
6	SDA	Serial input data
7	SCL	Serial clock input
8	RST	Controller reset signal, Active Low

### Mechanical Data

Item	Standard Value	Unit
Module Dimension	51.2 x 20.7	mm
Viewing Area	40.0 x 10.0	mm
Dot Pitch	0.41 x 0.48	mm
Dot Size	0.36 x 0.43	mm

### Electrical Characteristics

Item	Symbol	Standard Value	Unit
		typ.	
Input Voltage	V <sub>DD</sub>	3/5	V
Recommended LCD Driving Voltage for Normal Temp. Version module @25°C	V <sub>o-Vss</sub>	4.50	V