


Pin	Symbol
1	GND
2	VDD
3	BLE
4	D/C
5	WR
6	RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	NC
24	NC
25	CS
26	RST
27	L/R
28	U/D
29	NC
30	NC
31	NC
32	NC
33	VLED-
34	VLED-
35	VLED+
36	VLED+

修改pcb尺寸

1	Lcd Type	TFT
2	Gray Scale Inversion Direction	6 O'clock
3	Polsrizer Mode	TRANSMISSIVE
4	screen size	7.0(diagonal)
5	display format	800 RGB X 480
6	Operating Temperature	-20°C ~70°C
7	Storage Temperature	-30°C ~80°C
8	Active area	154.08(W) X 85.92(H)
9	dot pitch	0.0642(W) X 0.1790(H)
10	Color arrangement	RGB-STRIPE

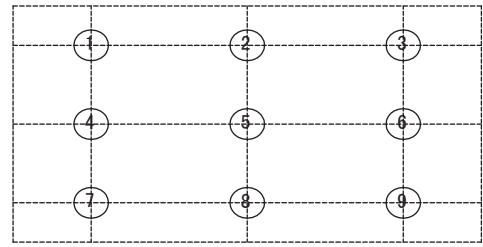

The non-specified tolerance of dimension is ± 0.3 mm.